


WARREN RUPP®

Quality System
ISO9001 Certified

Environmental
Management System
ISO14001 Certified

IDEX
IDEX CORPORATION

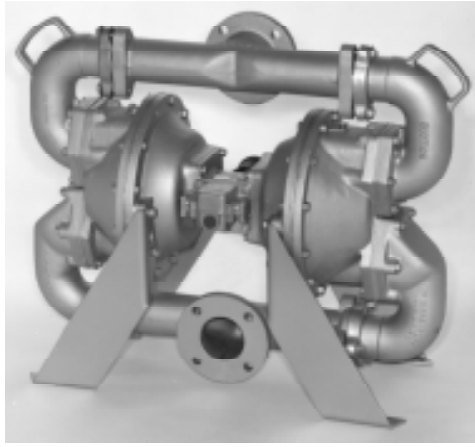

SandPIPER®

FLAP VALVE

SA3-A Type 7



Air-Powered Double-Diaphragm Pump

ENGINEERING, PERFORMANCE
& CONSTRUCTION DATA

INTAKE/DISCHARGE PIPE SIZE 3" (75mm)125# ASA FLANGE	CAPACITY 0 to 260 gallons per minute (0 to 988 liters per minute)	AIR VALVE No-lube, no-stall design.	SOLIDS-HANDLING Up to nearly 3" (75mm)	HEADS UP TO 125 psi or 289 ft. of water (8.8 Kg/cm ² or 88 meters)
---	--	---	--	--

PERFORMANCE CURVES

SandPIPER® pumps are designed to be powered only by compressed air
Temperature Limit: 212°F - 100°C MAXIMUM

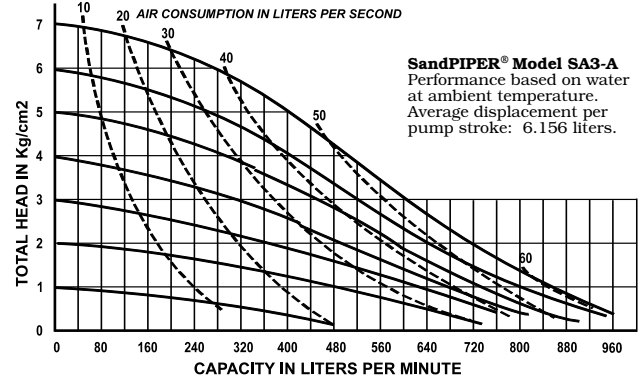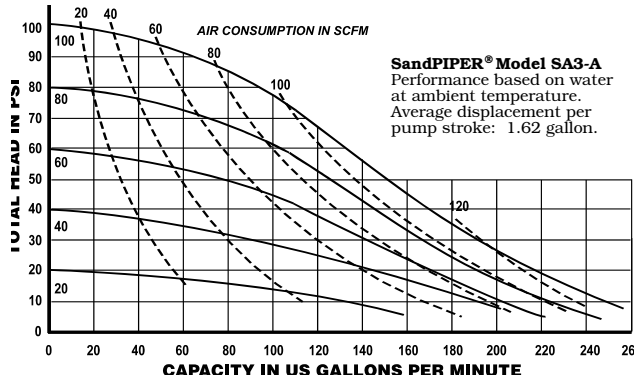

MATERIALS OF CONSTRUCTION

SA3-A Type 7	Manifold Porting			Manifold Elbow	Outer Chamber	Inner Chamber	Outer Diaphragm Plate	Inner Diaphragm Plate	Intermediate Housing	Diaphragm Rod	Valve Seat	Hard-ware	Diaphragm	Flap Valve Material	Seat Gasket	Manifold Gasket Sealing Rings	Shipping Wt.(lbs)
	Top	Side	Bottom														
DA-7			X	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	CI	PS	N	R	A	B	245
DN-7			X	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	CI	PS	N	N	A	B	245
DB-7			X	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	CI	PS	B	B	A	B	245
DK-7			X	356-T6AL	356-T6AL	356-T6AL	Alm35AL	Alm35AL	356-T6AL	416SS	CI	PS	N	H	A	B	245
DA-7-S			X	356-T6AL	356-T6AL	356-TSAL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	N	R	A	B	250
DB-7-S			X	356-T6AL	356-T6AL	356-TSAL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	B	B	A	B	250
DN-7-S			X	356-T6AL	356-T6AL	356-TSAL	Alm35AL	Alm35AL	356-T6AL	416SS	SS	PS	N	N	A	B	250

Meanings of Abbreviations:

A = Compressed Fibre
AL = Aluminum
Alm = Almag 35 Aluminum
B = Buna-N

CI = Cast Iron
H = Hytrel®
N = Neoprene


PS = Plated Steel
R = Rupplon®
SS = Stainless Steel

Hytrel® is a registered tradename of E.I. du Pont. ©Warren Rupp, SandPIPER and Rupplon are registered tradenames of Warren Rupp, Inc.

SA3-A FLAP VALVE SandPIPER®

MATERIALS	Operating Temperatures		
	Maximum*	Minimum*	Optimum**
BUNA-N General purpose, oil-resistant. Shows good solvent, oil, water and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons and nitro hydrocarbons.			
NEOPRENE All purpose. Resistant to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters, nitro hydrocarbons and chlorinated aromatic hydrocarbons.			
HYTREL® Good on acids, bases, amines and glycols at room temperature only.			
RUPPLON® (Urethane) Shows good resistance to abrasives. Has poor resistance to most solvents and oils.			
For specific applications, always consult the Warren Rupp Chemical Resistance Chart.	*Definite reduction in service life. **Minimal reduction in service life at ends of range.		

Dimensions are ± 1/8"
Figures in parenthesis = millimeters

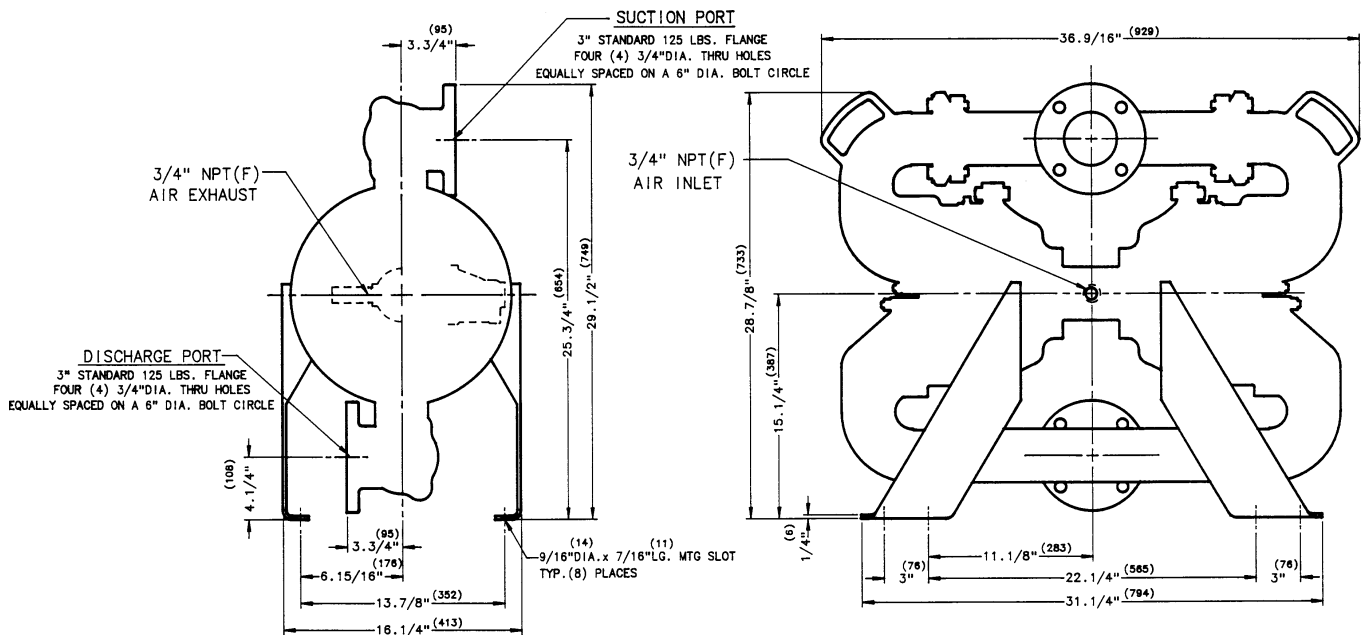

Copyright© 2001 Warren Rupp, Inc. All rights reserved. Specifications are subject to improvement without notice. ©Warren Rupp, SandPIPER and Ruppilon are registered trademarks of Warren Rupp, Inc.

Warren Rupp, Inc., A Unit of IDEX Corporation • P.O. Box 1568, Mansfield, Ohio 44901-1568 • 419) 524-8388 • Fax (419) 522-7867 • www.warrenrupp.com

SA3-A 7/01